



Key Features :

- Highly resistant ABS housing, UV prevention
- Magnetic dynamic sounders with 120dB at 1M
- With / without backup battery (Optional)
- Positive / negative siren trigger
- Positive / negative flash trigger
- 3 way tamper switch protection
- Available in Red and Blue color


Specification :

Material	ABS Housing with UV Resistance
Operating Voltage	13.5VDC
Standby Current Consumption	1300mA (DC : 13.5V)
Backup Battery	Rechargeable Lead Acid Battery 12V 1.3AH
Siren Output	118 ±3dB/M
Operating Temperature	-10°C ~ +50°C
Siren	Magnetic
Flash Rate	70 ~ 90 times/min
Timers	1min, 3min, 15min, Continuous
IP Rating	IP45
Dimensions	260mm x 180mm x 85mm

Characteristics :



Internal Structure

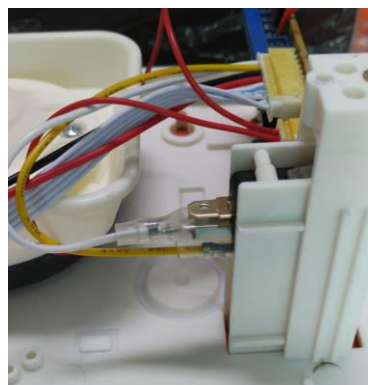

**Triple Tamper Protection
(Lid, Wall, Screw Protection)**



Backup Battery 12V 7AH




Internal Metal Protection



**Bulb Lens Alarm
Twin Alternating LEDs**

Standalone Operation :

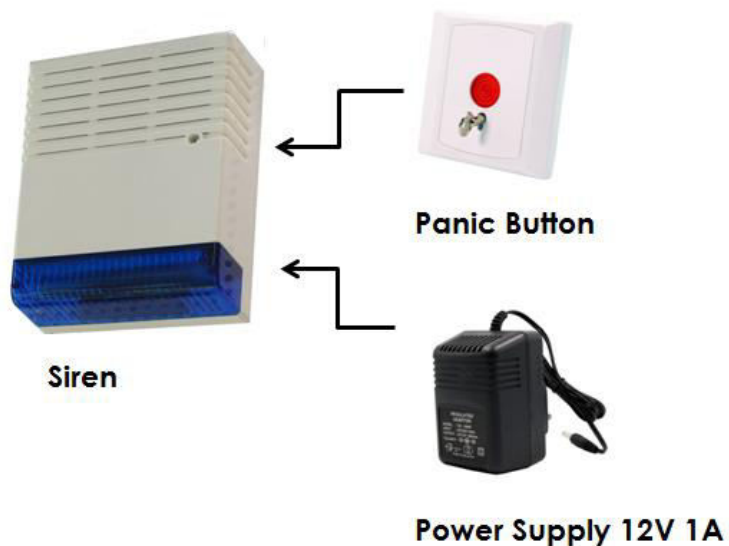

Connect to Alarm System :

