

Delayed egress panic exit devices

Standalone on access control online version is available.

1. Delay egress, optional 0, 5, 10, 15 seconds
2. Down counter display
3. key to reset
4. key to open door
5. Fail safe
6. Material: 304 or stainless steel painted

Product Introduction

Delay egress panic exit device is suitable for public escape routes. The devices delay egress and trigger alarm when the touch bar is pressed, and the touch bar only can be released on 5-15s accordingly to the setting. The down counter is displayed. In non-emergency situation, the device will delay egress and it is helpful for anti-theft. It is good to applicate to supermarkets, shopping malls.


Controller Instruction

1. 5,10,15s delay time is adjustable
2. Display direction is adjustable, refer to setting diagram
3. Key to reset the lock to stop alarm
4. Key to open the door. When the key turn to the location of "OPEN" the device is open. If the key stay in this location, the door will become passage
5. European profile cylinder


Function Option dial switch: Position 1 and 2 is for delay time setting. Position 3 is for showing setting. All as below list show:

Set	Diagram
5s delay	
10s delay	
15s delay	
0s delay	
Right Open	
Left Open	

Installation Diagram

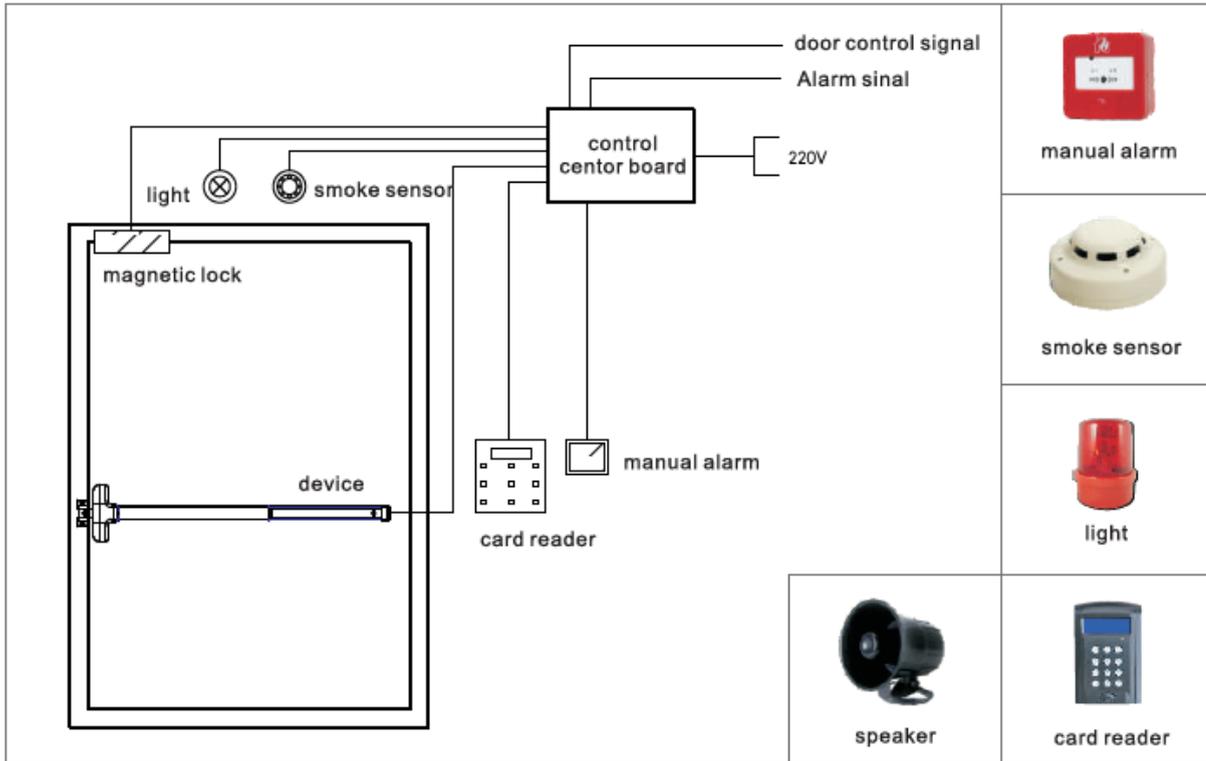

Wiring Connection:

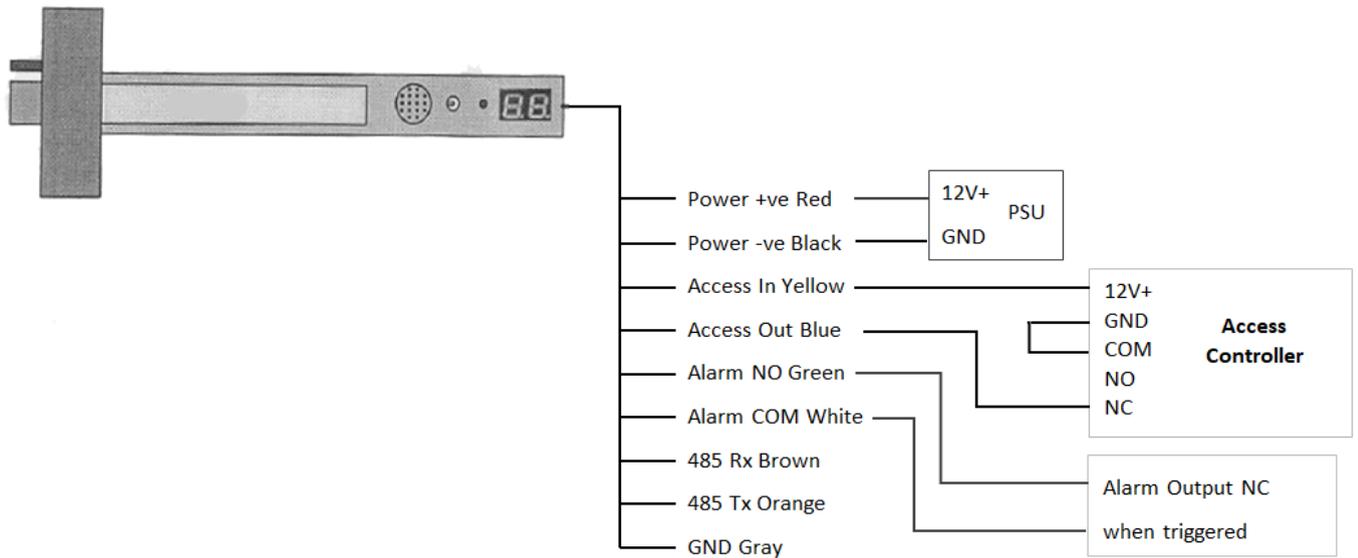

User Guide:

1. The power cord is extracted from the rear of the lock body and the input power is DC 12V/3A
2. Working status, the LED show bright RED. When press the touch bar, the LED flashed, speaker alarm and down counter display. Alarm stop, the LED is changed to GREEN, and press the touch bar, the door is open
3. Turn the key to location of "OPEN" the LED is changed from red to blue, in 3 seconds the touch car will be pressed and door open.
4. Turn the key to location " RESET", the device will reset to working status.
(the device only release the touch bar for 3 seconds . after 3 seconds, the device will reset to working status