




EL-KS1

## Specification

- 2 position Removable Key, single pole
- Flush Stainless Steel face plate
- Lock Housing: Zinc Alloy Die-casted, chrome plated
- Cylinder: 7 pin constructed, Zinc Alloy Die-casted
- Tubular key Nickel plated
- Contact Rating: 4A 125VAC, 2A 250VAC
- CE approved.
- Dimension: 86.8mm(L) x 86.8mm(W) x 23mm(H)

## Technical Information

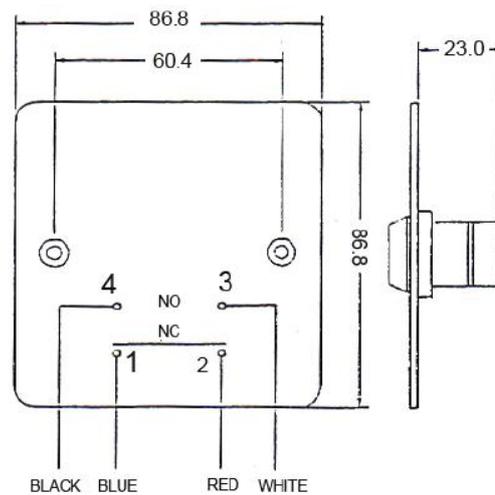

N/C - Normally Closed:  
 Connection between blue & red  
 wired for normally closed.

N/O - Normally Open:  
 Connection between black & white  
 wired for normally open