



## Resettable Emergency Door Release

### Description:

The EM201GD resettable door release is unlike the break glass unit. It offers the benefits & environmental advantages of a resettable operating element.

### Key Features:

- Flexible manual call point, Comply with a requirement of EN54-11
- Fast and easy installation, Special tool operating test facility
- Unique 'Plug & Play' installation concept
- Simple maintenance - Only one tool is needed for test and reset
- Choice of surface or flush mount, Marking options

### Technical Specification:

- Operating voltage: 30 VDC
- Operating current: 2 A
- Withstood-voltage: 250 VAC
- Temperature range: -30 °C to +70 °C
- Ingress protection rating: IP24D
- Mounting way: Wall mounting
- Dimension: 87 mm x 87 mm x 52 mm

Also available in ■ EM-201RD ■ EM-201BD




### Accessories:

Code	Description
EM201MM	Plain Hinged Cover


# INSTALLATION INSTRUCTIONS FOR THE MANUAL CALL POINT

## MODEL : EM-201XD

TO TEST / TO RESET

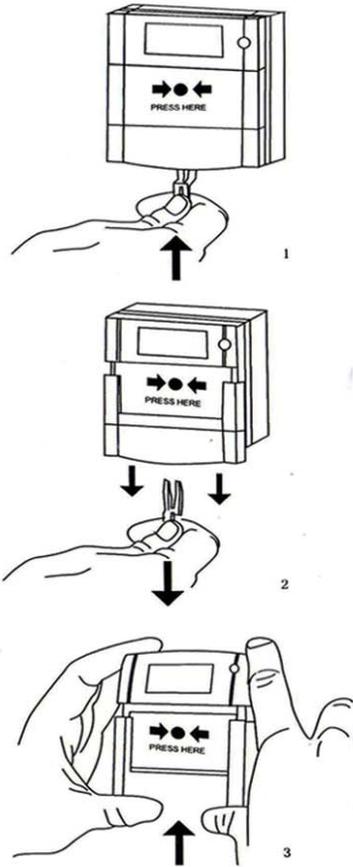

TO REPLACE GLASS / RESETTABLE ELEMENT

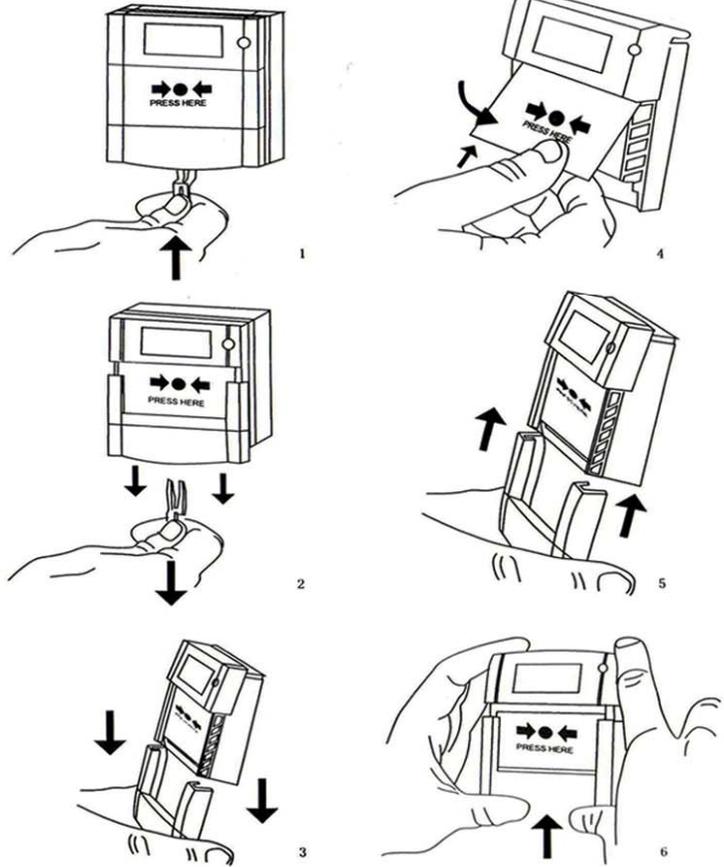


# INSTALLATION INSTRUCTIONS FOR THE MANUAL CALL POINT


## MODEL : EM-201XD

### PUSH FIT CONNECTOR

After wiring the terminal connector, plug into the appropriate position, see connection details (left).

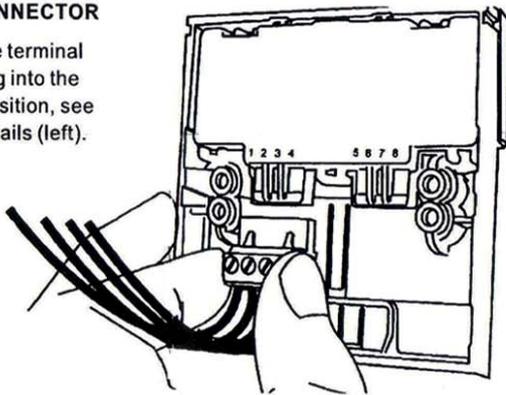

### CONNECTION DETAILS

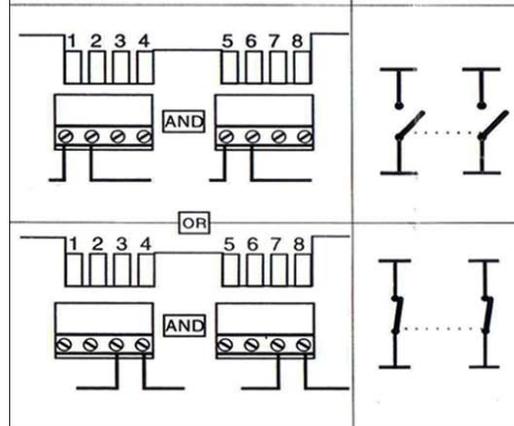

### TECHNICAL DATA



30VDC Max



-30°C to 70°C



**Important Notes:**  
Please do not over tighten fixing screws. The use of lubricants, cleaning solvents or petroleum based products should be avoided.



2A Max



Red, Ral 3001  
Yellow, Ral 1006  
Green, Ral 6016  
White, Ral 9010  
Blue, Ral 5002



IP24D



110/160g

### DIMENSIONS

