

WATERPROOF - ACCESS CONTROL KEYPAD READER




Product Features

- Weatherproof RFID proximity reader and controller, easy to install, easy to use, stable performance.
- Independent access control, can be directly implemented user passwords and cards.
- Strong, sturdy and vandal proof Zinc Alloy electroplated case
- Supports user capacity up to 2000.
- Indication: LED, electronic buzzer and backlit keypad .
- Weigand 26 out/in (can be used as weigand reader to controller).
- Built-in high-current output drive the electric lock.
- External doorbell option on the panel.

Technical Specifications

Model	FS-602
Material	Strong zinc alloy electroplated anti-vandal case
User Capacity	2000
Card Type	EM(ID) card 125KHz
Open Mode	Card / Card+Password / Password
Operating Voltage	DC 12V-24 ±10%
Active Current	<60mA
Idle Current	25±5 mA
Lock Output Load	Max 20A
Alarm Output Load	Max 20A
IP Rating	IP68
Adjustable Door Relay time	0 -99 seconds
Adjustable Alarm Time	0- 3 minutes
Wiegand Interface	Wiegand 26 bit
Environmental Temperature	-45°C~60°C
Relative Humidity	Working: 40%~90%RH, Storage: 20%~90%RH
Card Reading Distance	30~60mm
Backlit	Yes
Dimensions	120×80×25(mm)
Weight	550g

Dimension

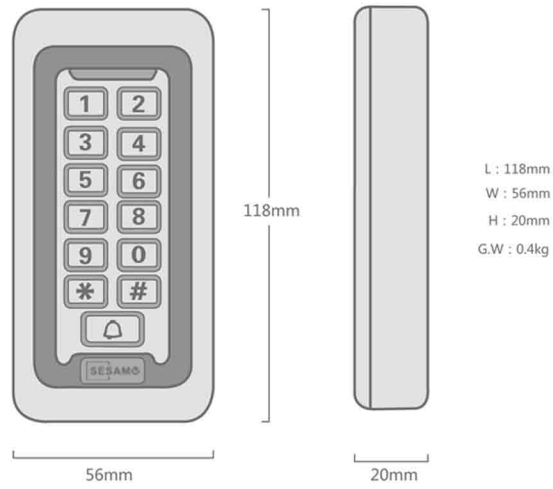

Wiring Diagram

